


Landscaping Plan
1 : 100




Site Plan
1 : 500

- Hedge planting pits**
- Timing: Excavate 1-2 days (max.) before planting.
 - Pit Sizes: Wide enough to accommodate roots when fully spread + 75mm deeper than root system.
 - Pit bottom improvement : Break up to a depth of 150mm, incorporating 25g of slow release fertiliser per planting pit.
 - Backfill material: Reuse excavated material
 - Watering: Immediately after planting, thoroughly and without damaging plants or soil.
 - Firming: Lightly firm soil around plants and fork and/or rake soil without damaging roots to a fine fillth with gentle cambers and no hollows

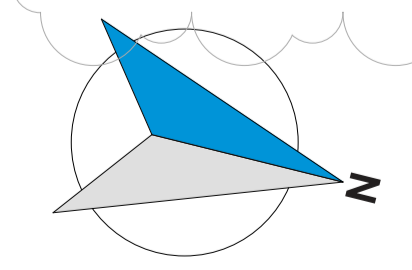

0m 2m 4m 6m 8m 10m
VISUAL SCALE 1:100 @ A1

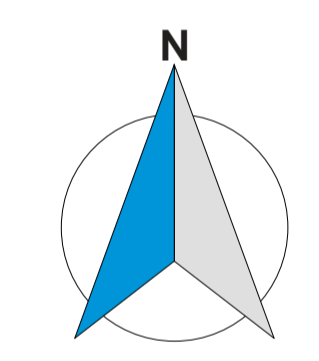

0m 10m 20m 30m 40m 50m
VISUAL SCALE 1:500 @ A1

Rev	Description	By	Chk	Date
P3	Hedge specification added	CJR	TM	12/06/2020
P4	CP issue / Planning Issue, CP June 2020	CJR	TM	30/06/2020
P5	Condenser enclosure moved, 1.8m high weldmesh inboard of main fence line + gate removed	CJR	TM	22/07/2020

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED. DO NOT SCALE OFF DRAWINGS. ALL DIMENSIONS ARE NOMINAL AND MUST BE CHECKED ON SITE. ALL DRAWINGS ARE COPYRIGHT OF DARWIN GROUP LTD AND CANNOT BE REPRODUCED WITHOUT WRITTEN CONSENT OF DARWIN GROUP LTD.
IF THERE ARE ANY DISCREPANCIES WITH ANY INFORMATION PROVIDED, IT IS THE CONTRACTORS RESPONSIBILITY TO NOTIFY DARWIN GROUP LTD IMMEDIATELY.

DarwinGroup London House, Showbury Business Park, Showbury, Stroud, Gloucestershire, GL8 4EA
TEL: 01539 252900
www.darwingroup.co.uk

PROJECT TITLE: Red Kite Academy ADDRESS: Corby NN18 0BY

DRAWING TITLE: Proposed Landscaping Plan

DRAWING REFERENCE

180235	DGL	01	XX	DR	A	1400
PROJECT	ORGANISOR	VOLUME	LEVEL	TYPE	ROLE	NUMBER

19/05/20	19/05/20	19/05/20	19/05/20	19/05/20	19/05/20	303 m ²
INITIAL ISSUE DATE	INITIAL ISSUE BY	INITIAL CHECKED BY	INITIAL CHECKED BY	INITIAL CHECKED BY	INITIAL CHECKED BY	AREA

S2	For Information	indicated	A1	P5
SUITABILITY	STATUS DESCRIPTION	SCALES	SHEET	REV

Prior to execution, the sub-contractor is to assume design responsibility for all elements of their work and satisfy themselves with the details shown on the drawing. Design, compliance with relevant regulations and execution on site is the responsibility of the appointed sub-contractor

To be read in conjunction with drawings:
180235-DGL-XX-DR-A-9400-Standard_Landscaping_Details

22/07/2020 15:46:37